



Technical name Attraction grid

Area coverage (m²) Light source (W) (UV-A) Type of UV lamps Electrical supply (V) Catch specifications (V) Power consumption (W)

Weight (kg) Material

Degree of protection (IP)

Guarantee Int. building norm Lamp life time (h)

Dimensions (L\*D\*H) (mm)

CE-approval Mounting position Mounting options

Cable Packaging Manual Service : Flex-trap 45 insect control system

: optimises landing behaviour of flying insects for 30% efficiency increase

: 45 m<sup>2</sup> per Flex-trap module : 1 x 15 watt PowerLine UV-A lamp

: UV Lamps RoHS certified

: 220-240, other voltages upon request : by means of long life glue board

: 22 : 2

: stainless steel front grid, cover made of ABS plastic

: IP 21 (drip proof) : 1 year return to base

: acc. IEC-335-259 int. standard for insect exterminators

: 9000

: 550 \* 120 \* 120

: yes


: wall mounted, horizontal or vertical

: Multiple units can be connected side-by-side and /or back-to-back. These can be mounted on the ceiling, wall mounted or

flag mounted : included

: neutral cardboard box included : enclosed with the unit in English

: unit can be dismantled without special tools

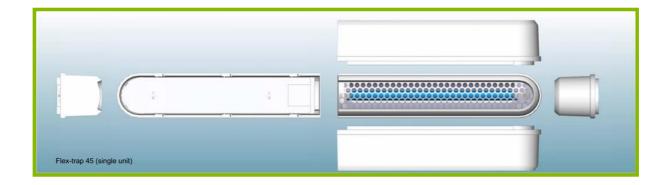

Authorized dealer:

