


Technical Data sheet **INSECTRON® 310 EX**
Fly Control Systems



| | | | |
|------------|----------------|--------------|-------------|
| scale: 1:3 | date: 28-01-00 | description: | remarks: |
| unit: mm | drawn: A.F. | LAYOUT | |
| | appr: | INSECTRON | |
| | | TYPE I-310EX | |
| rev. | date | appr. | project no: |
| | | | order no: |
| | | | |
| | | | |

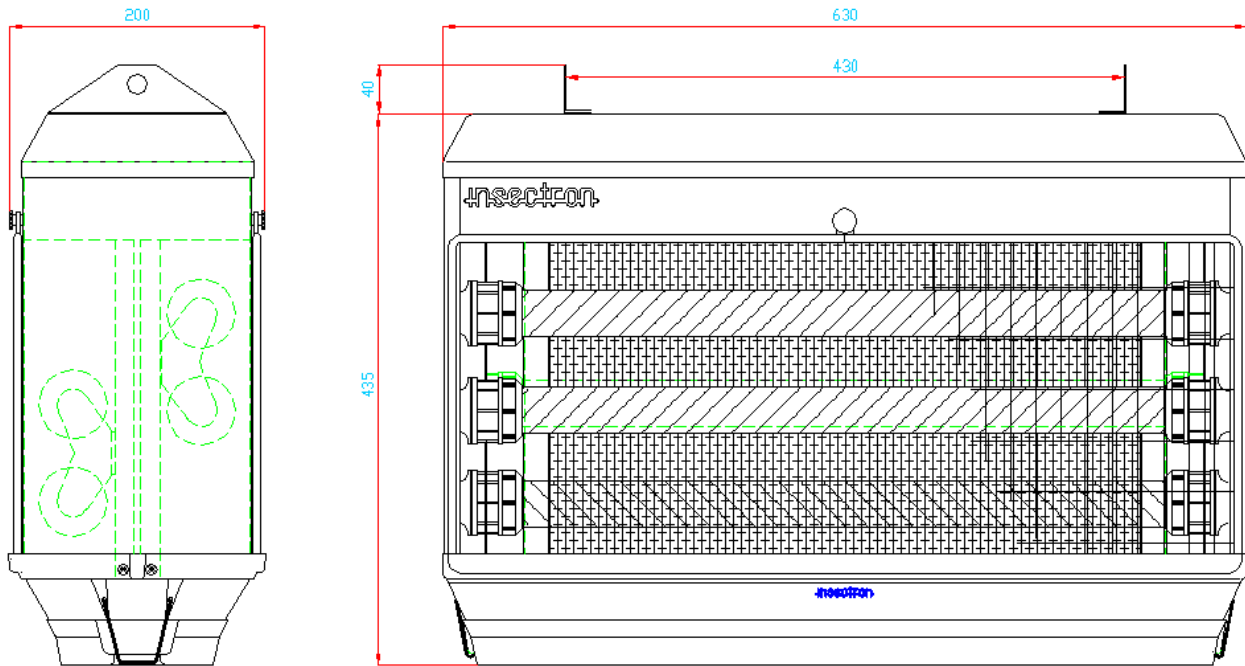

| | |
|-------------|-------|
| drawing no: | size: |
| 009-186 | A3 |

| | |
|---------------------------|---|
| Technical name | : I.310 EX |
| Area coverage | : 300-350 m ² |
| Light source (UV-A) | : 4*20W (green / other lamps on request) |
| Electrical supply | : 230V (other voltages on request) |
| Catching device | : sticky board |
| Power consumption | : 95W |
| Dimensions (L*W*H) | : 630*200*475 |
| Weight | : 13,5 kg |
| Material | : stainless steel 304 (excl. galvanised grids) |
| Stainless steel grids | : optional |
| Glass protection sleeves | : standard |
| Lamp lifetime | : 6000 hrs* |
| Degree of protection | : IP 65 (hoseproof) |
| KEMA** ATEX certification | : yes |
| Quality standard | : ISO 9001 |
| Int. building norm | : acc. IEC-355-259 int. standard for insect exterminators |
| CE-approval | : yes |
| EMC-approved | : yes |
| Guarantee | : 5 years on the electrical functioning |
| Mounting position | : ceiling mounted |

* after 6000 hours a loss of 30% in efficiency has to be expected

** KEMA is part of the European network of approval stations, EQ-NET