## Product sheet Flex-trap 45

## professional insect control units



## 10 reasons to start using the Flex-trap 45 unit:

- 1) Units connectable side ways and / or back to back
- 2) Unit(s) can be wall mounted horizontal, vertical or flag mounted
- 3) Units can positioned free standing
- 4) Stainless steel front cover
- 5) Effective coverage of areas up to 45m<sup>2</sup>
- 6) Easy service, direct access to lamp, board and starter
- 7) Meets ISO 9001 / RoHS & CE standard, HACCP compliant
- 8) Durable quality components, industrial design
- 9) High powered shatterproof UV-A lamp
- 10) 1 year full guarantee on the mechanical aspects


Flex-trap 45
can be mounted
horizontal or vertical

90′







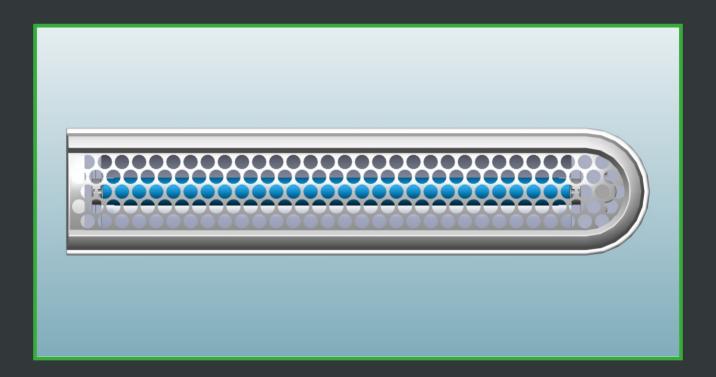

Technical name : Flex-trap 45 insect control system

Attraction grid : optimises landing behaviour of flying insects for 30%

efficiency increase

Area coverage ( $m^2$ ) : 45 m2 per Flex-trap module Light source (W) (UV-A) : 1 x 15 watt PowerLine UV-A lamp

Type of UV lamps : UV Lamps RoHS certified

Electrical supply (V) : 220-240, other voltages upon request Catch specifications (V) : by means of long life glue board

Power consumption (W) : 22 Weight (kg) : 2

Material : stainless steel front grid, cover made of ABS plastic

Degree of protection (IP) : IP 21 (drip proof)
Guarantee : 1 year return to base

Int. building norm : acc. IEC-335-259 int. standard for insect exterminators

Lamp life time (h) : 9000

Dimensions (L\*D\*H) (mm) : 550 \* 120 \* 120

CE-approval : yes

Mounting position : wall mounted, horizontal or vertical

Mounting options : Multiple units can be connected side-by-side and /or back-to-back.

These can be mounted on the ceiling, wall mounted or flag mounted

Cable : included

Packaging : neutral cardboard box included
Manual : enclosed with the unit in English

Service : unit can be dismantled without special tools

